RESOLUTION NO. 2014-08

A RESOLUTION OF THE CITY OF PACIFIC, MISSOURI, STATING INTENT TO SEEK FUNDING FOR IMPROVEMENTS TO HWY N PHASE 4 STP PROJECT AND IMPROVEMENTS FROM W. HAWTHORNE DRIVE TO MYERS FARM LANE.

WHEREAS, The City of Pacific seeks to apply and submit an application and application fee for funding for improvements to Hwy N Phase 4 from W. Hawthorne Drive to Myers Farm Lane, STP Project.

NOW THEREFORE, BE IT RESOLVED BY THE BOARD OF ALDERMEN FOR THE CITY OF PACIFIC, MISSOURI, AS FOLLOWS:

SECTION ONE: The Board of Aldermen hereby authorizes the City Administrator to apply for application for funding along the appropriate application fee on behalf of the City for improvements.

SECTION TWO: That the Board of Aldermen hereby approves and authorizes the City Administrator to sign all necessary documents on behalf of the City of Pacific.

Adopted by the Board of Aldermen and approved this 4th day of February, 2014.

_____
Herbert C. Adams, Mayor

ATTEST:

_____
City Clerk

Project Cost Estimate - Grant Application

Application Due - March 13, 2014

Hwy N Phase 4 - STP Project

No.	Description	Unit	Quantity	Unit Cost	Cost
1	Removal of Improvements	LS	1	45,000.00	$45,000.00
2	Linear Grading	STA	71	500.00	$35,500.00
3	Concrete Vertical Curb	LF	7,400	20.00	$148,000.00
4	Full Depth Pavement Widening	SF	24,000	7.00	$168,000.00
5	Retaining Wall	SF	2,600	25.00	$65,000.00
6	Pavement Milling	SY	21,700	1.75	$37,975.00
7	Pavement Fabric	SY	21,700	2.00	$43,400.00
8	Asphalt Surface Course	TON	3,000	70.00	$210,000.00
9	Concrete Entrances	SF	6,500	6.00	$39,000.00
10	Box Culvert Extension	LS	1	25,000.00	$25,000.00
11	Storm Sewer Installation	LF	2,200	45.00	$99,000.00
12	Storm Sewer Inlet	EA	14	2,850.00	$39,900.00
13	Restoration	LS	1	35,000.00	$35,000.00
14	"Bicycle Share the Road" Signs	EA	2	250.00	$500.00
15	Pavement Striping, 4" wide	LF	28,000	0.85	$23,800.00
16	Construction Mobilization	LS	1	70,000.00	$70,000.00
17	Construction Traffic Control	LS	1	15,000.00	$15,000.00

Project Notes:

1. Project length equals approx. 1.4 miles
2. From Hawthorne Drive to Myers Farm Lane
3. Construction - 2016
4. Existing pavement width @ 23', proposed @ 28'

Construction Sub-Total	$1,100,075
10% Contingency	$110,008
Project Total =	**$1,210,083**
Federal Share @ 80% =	$968,066
Local Share @ 20% =	$242,017
EWGCC Application Fee (1/2% of Federal Funds Requested) =	$4,840
Cochran Surveying/Engineering/Bidding Fee	$80,000
Construction Administration/Inspection/Testing	$45,000
City Expenditure (20% Share + Application Fee + Engineering)	**$371,857**

1/20/14

City of Pacific – Vicinity Map

STP Project Limits:
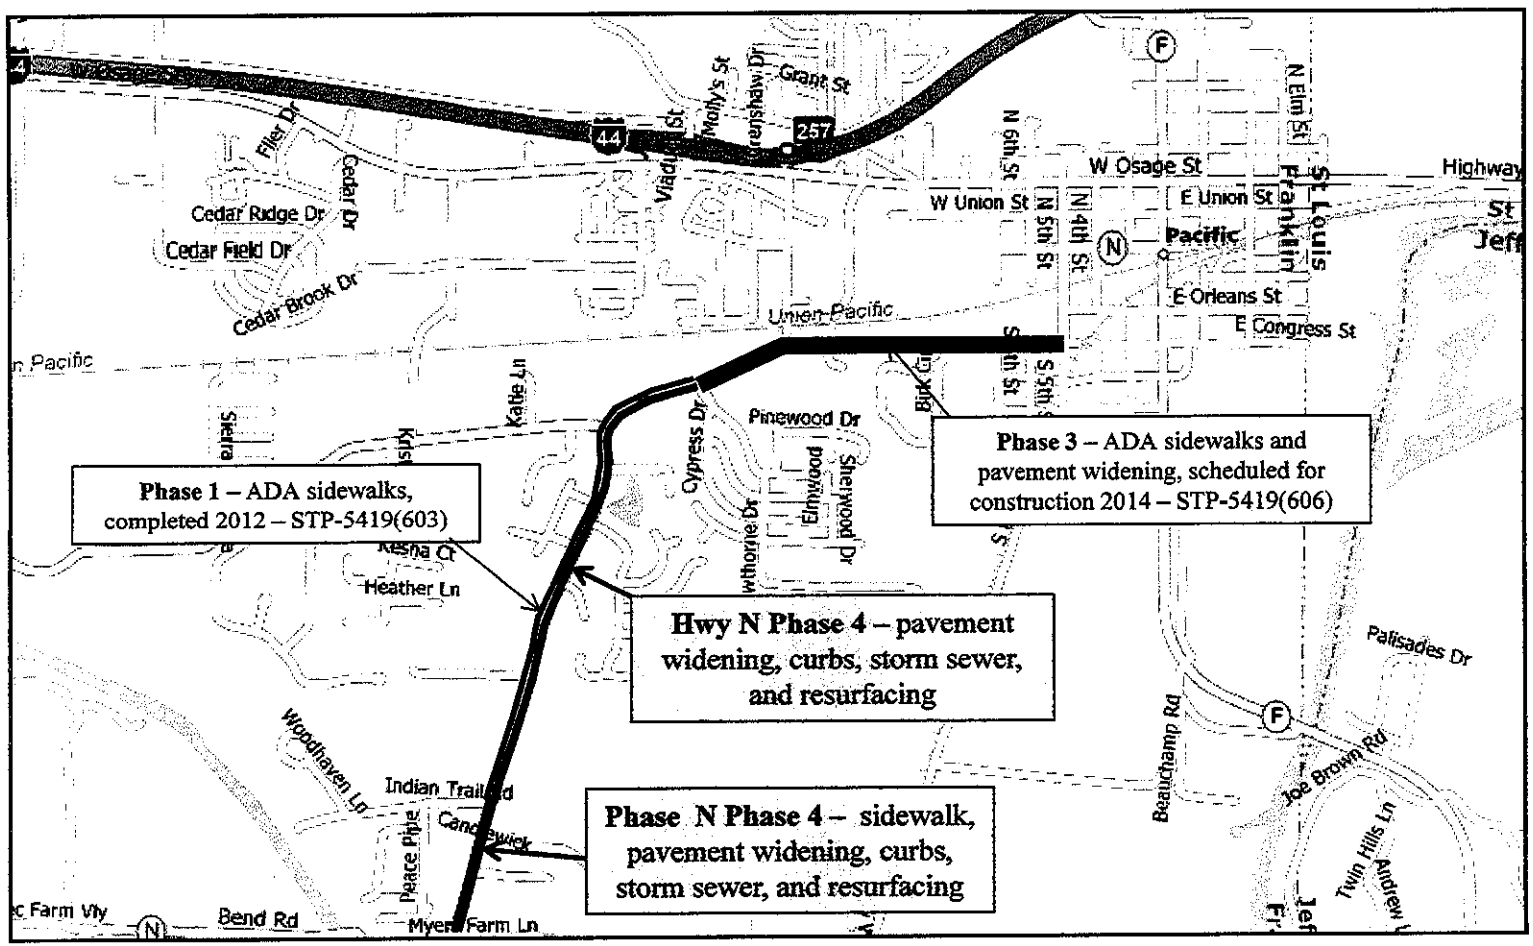
- **Hwy N Phase 4 – W. Hawthorne Dr. to Myers Farm Lane**